



Thank you for choosing ASWICH products.
Please read carefully before installation.

Aswich


Aswich EAS50

ROCKER TYPE AC ISOLATOR SERIES

Operation instruction for 20A,35A&63A of
EAS50-N Isolator

WIRING


The in-out line is shown by the arrow.

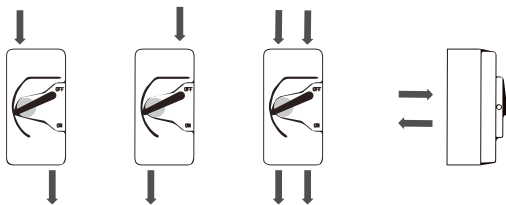

LOCKING OPERATION

Turn the switch to the "OFF" position and lock the cage through the keyhole with a suitable tool.


* The maximum diameter of the padlock is 6mm.



APPLICATION

- Motor isolator safety switches
- Motor disconnectors
- Air conditioning isolators
- The AC isolators PV inverters

CLOSE THE CASE

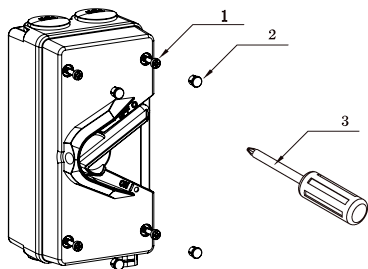

Use "(3) screwdriver" to lock "(1) connecting screw" to the outer box; then press "(2) hole plug" gently to complete.

SPECIFICATIONS

| | | | | |
|--------------------------|--|----------------------|------------------------------------|------------------------------------|
| Pole Configuration: | Single, Double, Triple, Quadruple | | | |
| Rated Current: | 20A, 35A, 63A (Single, Double, Triple, Quadruple) | | | |
| Rated Voltage: | 250V a.c. (Single) 440V a.c. (Double, Triple, Quadruple) | | | |
| Overall Dimensions: | 175.0mm (L) x 84.0mm (W) x 81.5mm (H) | | | |
| Conduit Entries: | 4 x M25 | | | |
| Maximum Cable Size: | Phase connections up to 25mm ² cable E and N 16mm ² cable | | | |
| Type Tested to: | EN 60947-3 AS/ NZS 60947.1&3 AC-22A IP66 | | | |
| Contacts Wiring Diagram: | Single | Double | Triple | Quadruple |
| | PE N L PE N L | PE N L PE N L | PE N L1 L2 L3 PE N L1 L2 L3 | PE N L1 L2 L3 PE N L1 L2 L3 |

Aswich

ASWICH ELECTRICAL CO., LTD

Chengdong Industrial functional zone,
Yueqing, Zhejiang 325604, China

F: +86-21-20950286

E: contact@aswich.com

H: www.aswich.com

Made in China